

■ Features


- Supersmall size
- High reliability
- High speed switching

■ Applications

- Rectification for high voltage power supply of color T.V.
- Rectification for high voltage power supply of CRTdisplay.
- Rectification for high voltage power supply of V.T.R camera.
- Others

■ Outline Dimensions and Mark

Unit: mm

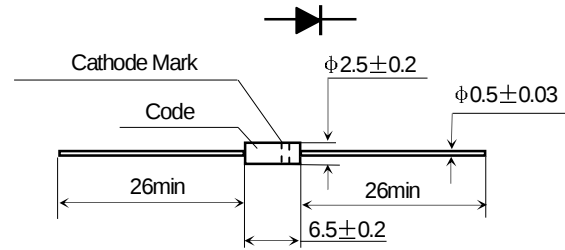

Type	Code	Cathode Mark
2CL703	T703	⋮
2CL704	T704	⋮


■ Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	2CL703	2CL704
Repetitive Peak Reverse Voltage	V_{RRM}	kV	3	4
Non-Repetitive Peak Reverse Voltage	V_{RSM}	kV	4	5
Average Forward Current	$I_{F(AV)}$	mA	5 (50Hz Half-sine wave, Resistance load, $T_a=25^{\circ}\text{C}$)	
Surge(Non-repetitive)Forward Current	I_{FSM}	A	0.5 (50Hz Half-sine wave, 1cycle, $T_a=25^{\circ}\text{C}$)	
Operating Ambient Temperature	T_a	$^{\circ}\text{C}$	-40 ~ +100	
Storage Temperature	T_{stg}	$^{\circ}\text{C}$	-40 ~ +120	
Virtual Junction Temperature	$T_{(M)}$	$^{\circ}\text{C}$	120	


■ Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max	
				2CL703	2CL704
Peak Forward Voltage	V_{FM}	V	$I_{FM}=10\text{mA}$	12	15
Peak Reverse Current	I_{RRM1}	μA	$V_{RM}=V_{RRM}$ $T_a=25^{\circ}\text{C}$	2	
	I_{RRM2}			5	
Reverse Recovery Time	t_{rr}	μs	$I_F=2\text{mA}$ $I_{RM}=4\text{mA}$	0.08	


■ Characteristics(Typical)

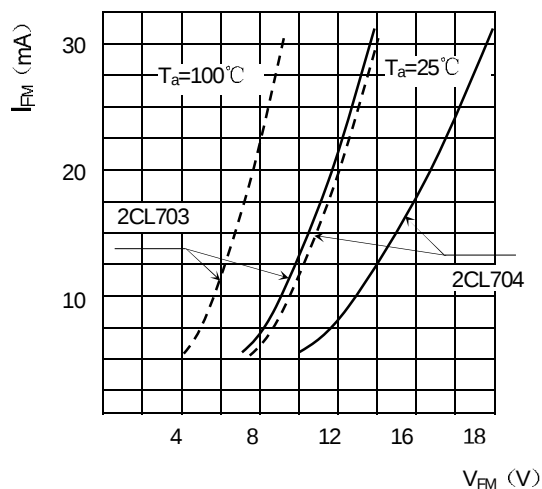


Forward Characteristics

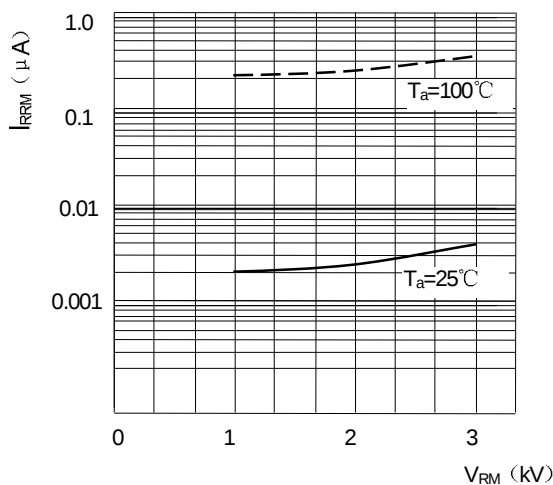


Reverse Characteristics

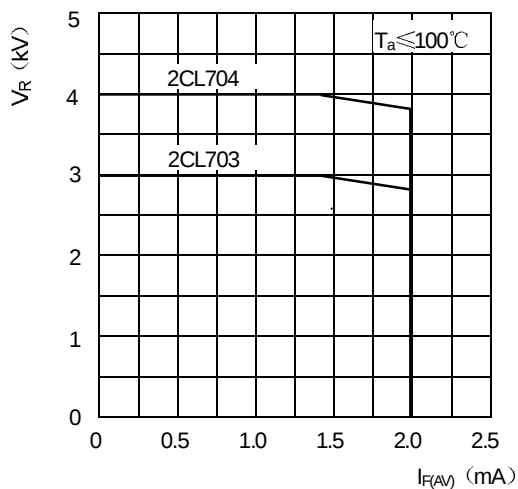


$V_R-I_{F(AV)}$ Curve

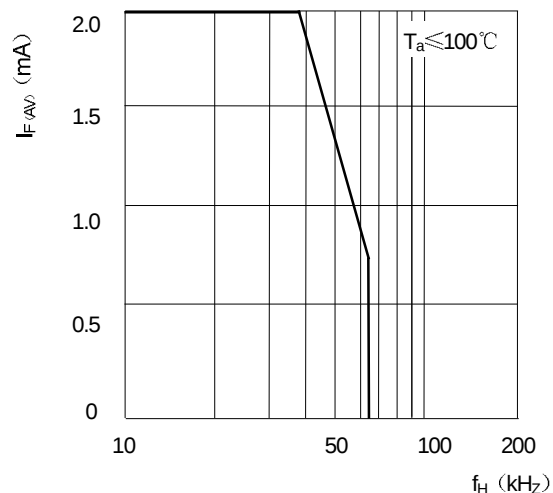

$I_{F(AV)}-f_H$ Curve

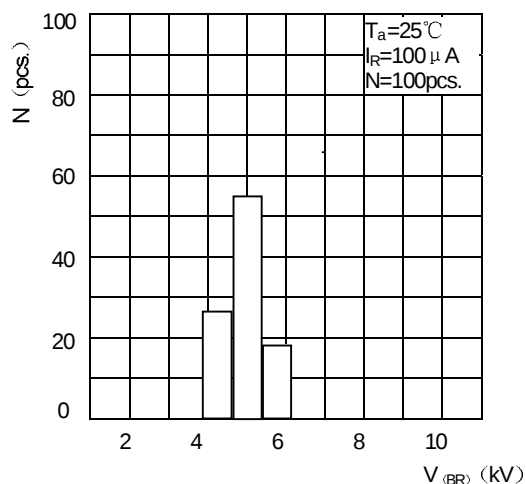

Breakdown Voltage Distribution

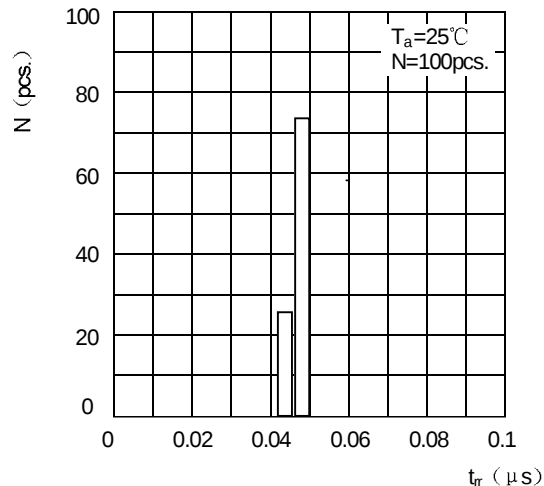

Reverse Recovery Time Distribution